


## BATTERY CHARGERS

### SERIE 5

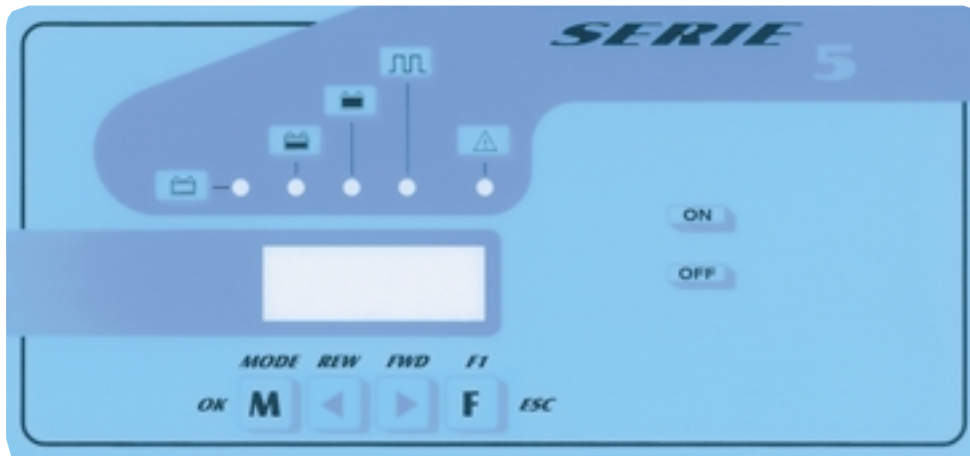

#### CHARACTERISTICS

- Characteristics as Serie 3
- Four Digit Display showing voltage, current, charging Time, accumulated capacity, etc.
- Final charging not depends on the time but of the real battery accumulated capacity
- The programming is directly made on the card by 4 keys.
- Charging time changes in according with the battery discharge
- Charging within 12 hours.
- Wa charging cycle (DIN 41774)
- Easy transport by two wheels
- Diagram pocket and cable carrier included



#### ADVANTAGES

- Best recharge in every condition.
- Do not overcharge the battery, only the needed capacity is given.
- Water consumption is reduced.

## BATTERY CHARGERS

### SERIE 5

#### MONOFASE

MODEL	CABINET	WEIGHT	VAC
5SCM 12/15	P	13	230
5SCM 12/20	P	14	230
5SCM 12/25	P	14	230
5SCM 12/30	P	15	230
5SCM 12/40	P	16	230
5SCM 12/60	M	20	230
5SCM 12/80	M	21	230
5SCM 24/20	P	16	230
5SCM 24/25	P	17	230
5SCM 24/30	P	18	230
5SCM 24/40	P	19	230
5SCM 24/50	M	25	230
5SCM 24/60	M	26	230
5SCM 24/80	I2	30	230
5SCM 24/100	I2	35	230
5SCM 36/20	P	17	230
5SCM 36/30	P	19	230
5SCM 36/40	M	24	230
5SCM 36/60	M	27	230
5SCM 36/80	I2	31	230
5SCM 36/100	I2	36	230
5SCM 48/30	M	25	230
5SCM 48/40	M	26	230
5SCM 48/50	M	27	230
5SCM 48/60	M	28	230
5SCM 48/80	I2	32	230
5SCM 48/100	I2	37	230

#### TRIFASE

MODEL	CABINET	WEIGHT	VAC
5SCT 24/60	I2	49	230/400
5SCT 24/80	I2	52	230/400
5SCT 24/100	I2	53	230/400
5SCT 24/120	I2	55	230/400
5SCT 24/140	I2	57	230/400
5SCT 24/160	I2	60	230/400
5SCT 36/60	I2	55	230/400
5SCT 36/80	I2	57	230/400
5SCT 36/100	I2	60	230/400
5SCT 36/120	I2	64	230/400
5SCT 36/140	I2	66	230/400
5SCT 36/160	I2	70	230/400
5SCT 48/60	I2	60	230/400
5SCT 48/80	I2	64	230/400
5SCT 48/100	I2	66	230/400
5SCT 48/120	I2	75	230/400
5SCT 48/140	I2	78	230/400
5SCT 48/160	I2	83	400
5SCT 72/60	I2	72	230/400
5SCT 72/80	I2	75	230/400
5SCT 72/100	I2	82	230/400
5SCT 72/120	I2	95	400
5SCT 72/140	I2	98	400
5SCT 72/160	I2	102	400
5SCT 80/60	I2	77	230/400
5SCT 80/80	I2	81	230/400
5SCT 80/100	I2	87	230/400
5SCT 80/120	I2	95	400
5SCT 80/140	I2	105	400
5SCT 80/160	I2	113	400
5SCT 96/60	I2	80	230/400
5SCT 96/80	I2	83	230/400
5SCT 96/100	I2	90	400
5SCT 96/120	I2	97	400
5SCT 96/140	L	108	400
5SCT 96/160	L	120	400