


BATTERY CHARGERS

SERIE 5 - FAST CHARGE

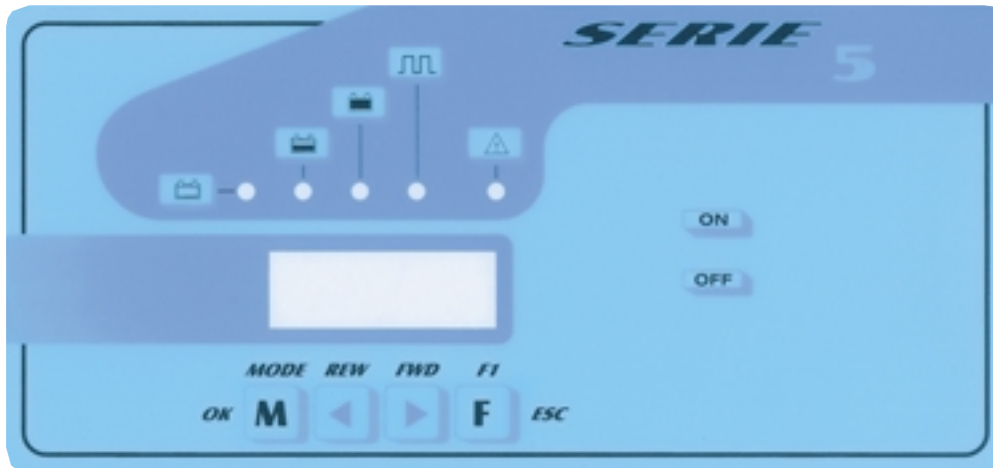

CHARACTERISTICS

- Characteristics as Serie 5
- Fast Charging cycle within 8 hours
- Charging Cycle Wo-Wa (DIN 41774)

ADVANTAGES

- Permit a faster recover of the Battery
- Reduce the Charging Time within 8 Hours
- Useful for the Firms working every 8 Hours.



BATTERY CHARGERS

SERIE 5 - FAST CHARGE

MONOFASE			
MODEL	CABINET	WEIGHT	VAC
5FCM 24/60	M	28	230
5FCM 24/80	I2	32	230
5FCM 24/100	I2	37	230
5FCM 36/60	M	29	230
5FCM 36/80	I2	33	230
5FCM 36/100	I2	38	230
5FCM 48/60	M	30	230
5FCM 48/80	I2	34	230
5FCM 48/100	I2	39	230

TRIFASE			
MODEL	CABINET	WEIGHT	VAC
5FCT 24/60	I2	54	230/400
5FCT 24/80	I2	56	230/400
5FCT 24/100	I2	58	230/400
5FCT 24/120	I2	60	230/400
5FCT 24/140	I2	62	230/400
5FCT 24/160	I2	65	230/400
5FCT 24/180	I2	70	230/400
5FCT 36/60	I2	60	230/400
5FCT 36/80	I2	62	230/400
5FCT 36/100	I2	65	230/400
5FCT 36/120	I2	69	230/400
5FCT 36/140	I2	71	230/400
5FCT 36/160	I2	75	230/400
5FCT 36/180	I2	80	230/400
5FCT 48/60	I2	65	230/400
5FCT 48/80	I2	69	230/400
5FCT 48/100	I2	71	230/400
5FCT 48/120	I2	80	230/400
5FCT 48/140	I2	83	230/400
5FCT 48/160	I2	88	400
5FCT 48/180	I2	95	400
5FCT 72/60	I2	77	230/400
5FCT 72/80	I2	80	230/400
5FCT 72/100	I2	87	230/400
5FCT 72/120	I2	100	400
5FCT 72/140	I2	103	400
5FCT 72/160	I2	107	400
5FCT 72/180	L	112	400
5FCT 80/60	I2	83	230/400
5FCT 80/80	I2	86	230/400
5FCT 80/100	I2	92	230/400
5FCT 80/120	I2	100	400
5FCT 80/140	I2	110	400
5FCT 80/160	I2	118	400
5FCT 80/180	L	125	400
5FCT 96/60	I2	85	230/400
5FCT 96/80	I2	88	230/400
5FCT 96/100	I2	95	400
5FCT 96/120	I2	100	400
5FCT 96/140	L	110	400
5FCT 96/160	L	118	400
5FCT 96/180	L	127	400