# GEL SYSTEM

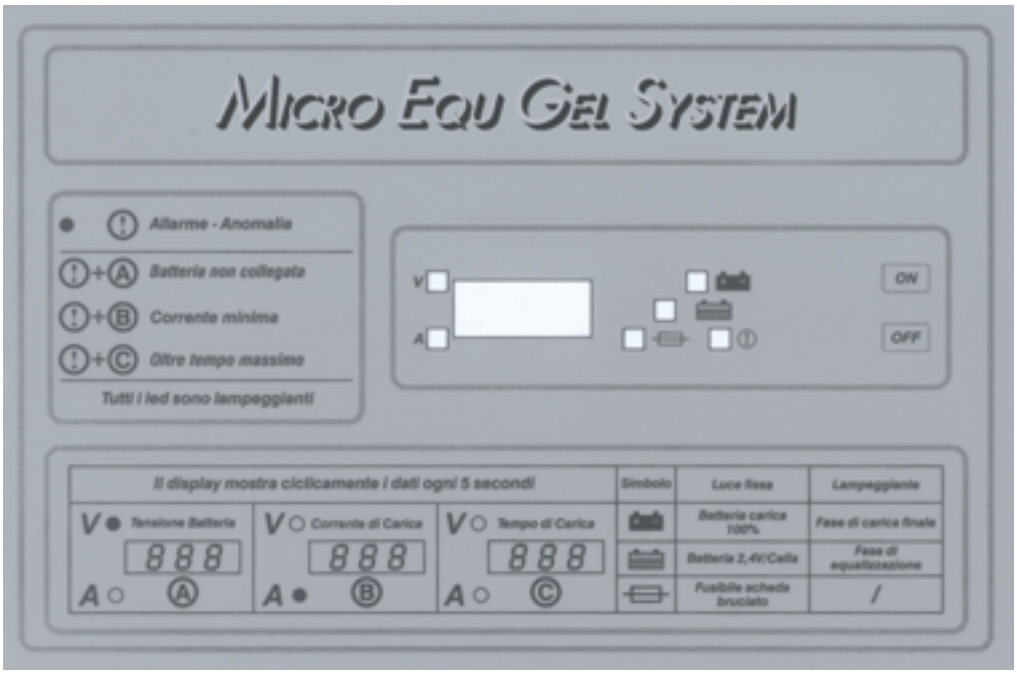


## CHARACTERISTICS

- Characteristics as Serie 5
- Fit for Gel, without maintenance or sealed battery.
- Charging cycle IU (DIN 41773)
- Voltage and current electronic control

## ADVANTAGES

- Improvement of the Charging and higher battery capacity
- Full control of the charging parameters
- High technology worth
- Minimum consumption of water if used for traction acid battery

# GEL SYSTEM

## MONOFASE

| MODEL | CABINET | WEIGHT | VAC |
|---|---|---|---|
| GM 24/20 | M | 26 | 230 |
| GM 24/25 | M | 26 | 230 |
| GM 24/30 | M | 27 | 230 |
| GM 24/40 | M | 29 | 230 |
| GM 24/50 | M | 30 | 230 |
| | | | |
| GM 36/30 | M | 28 | 230 |
| GM 36/40 | M | 30 | 230 |
| GM 36/50 | M | 35 | 230 |
| | | | |
| GM 48/40 | M | 37 | 230 |
| GM 48/50 | M | 42 | 230 |

## TRIPHASE

| MODEL | CABINET | WEIGHT | VAC |
|---|---|---|---|
| GT 24/80 | L | 62 | 400 |
| GT 24/100 | L | 64 | 400 |
| GT 24/120 | L | 66 | 400 |
| GT 24/140 | L | 68 | 400 |
| GT 24/160 | L | 71 | 400 |
| | | | |
| GT 36/60 | L | 66 | 400 |
| GT 36/80 | L | 68 | 400 |
| GT 36/100 | L | 71 | 400 |
| GT 36/120 | L | 75 | 400 |
| GT 36/140 | L | 77 | 400 |
| GT 36/160 | L | 81 | 400 |
| | | | |
| GT 48/60 | L | 71 | 400 |
| GT 48/80 | L | 75 | 400 |
| GT 48/100 | L | 77 | 400 |
| GT 48/120 | L | 86 | 400 |
| GT 48/140 | L | 89 | 400 |
| GT 48/160 | L | 94 | 400 |
| | | | |
| GT 72/60 | L | 83 | 400 |
| GT 72/80 | L | 86 | 400 |
| GT 72/100 | L | 93 | 400 |
| GT 72/120 | L | 106 | 400 |
| GT 72/140 | L | 109 | 400 |
| GT 72/160 | L | 113 | 400 |
| | | | |
| GT 80/60 | L | 89 | 400 |
| GT 80/80 | L | 92 | 400 |
| GT 80/100 | L | 98 | 400 |
| GT 80/120 | L | 106 | 400 |
| GT 80/140 | L | 116 | 400 |
| GT 80/160 | L | 124 | 400 |
| | | | |
| GT 96/60 | L | 91 | 400 |
| GT 96/80 | L | 94 | 400 |
| GT 96/100 | L | 101 | 400 |