


BATTERY CHARGERS

MULTI

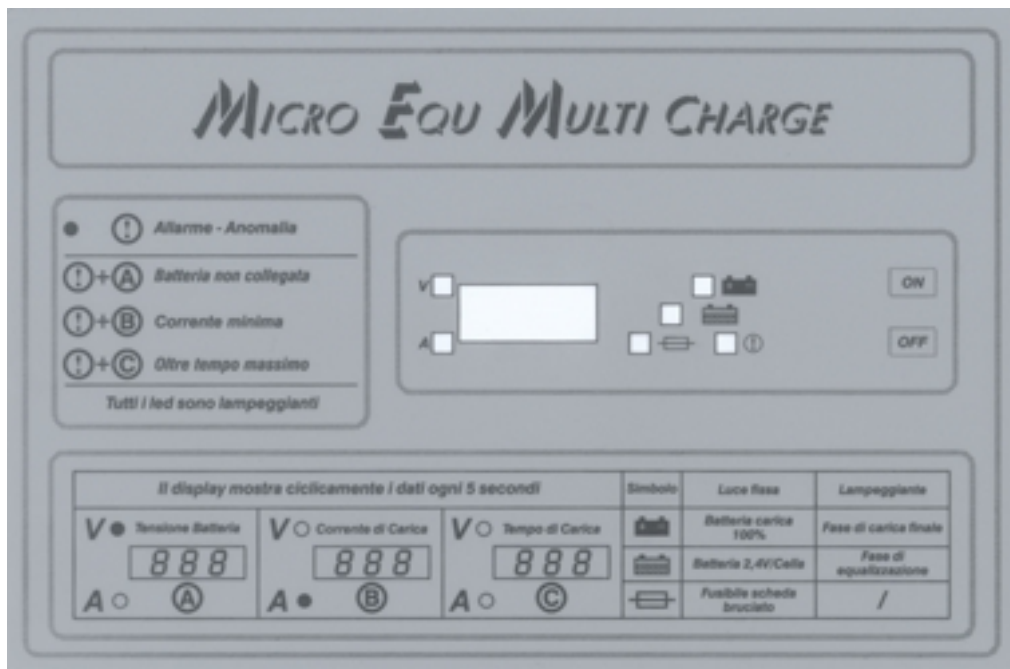

CHARACTERISTICS

- Automatic selection of the Battery Voltage
- Manual potentiometer (10 turns) for Setting-up the Initial Current
- Manual option - for no standard battery and single element.
- Manual set of current, voltage and charging time.

ADVANTAGES

- With only a Battery Charger is possible to cover the entire range of your Batteries either in Voltage or in Capacity.
Standard: 12 - 24 - 36 - 48 - 72 - 80 - 96
- The automatic recognition of the Battery avoid the possibility of wrong connection
- Possibility to recover Batteries with different elements



BATTERY CHARGERS


MUTLI CHARGE

TRIFASE

| MODEL | CABINET | WEIGHT | VAC |
|----------|---------|--------|-----|
| MT 80 E | L | 97 | 400 |
| MT 100 E | L | 102 | 400 |
| MT 120 E | L | 112 | 400 |
| MT 80 D | L | 97 | 400 |
| MT 100 D | L | 102 | 400 |
| MT 120 D | L | 112 | 400 |



Dimensions of the chargers

| Model |  | X | Y | H |
|-------|---|------|-----|-----|
| P | | 260 | 325 | 315 |
| M | | 670 | 310 | 380 |
| L | | 930 | 590 | 430 |
| I2 | | 1000 | 500 | 400 |

OPTIONS SERIE 3

| |
|--------------------------------------|
| Wheels kit |
| Drawing pocket (*) |
| Ac Main switch with external handles |
| Ac main fuses |
| Cable carrier (*) |
| (*) Serie 5 included |