

## BUILT-IN CHARGERS FOR ELECTRIC BOOM LIFTS, SCISSOR LIFTS,...




### Characteristics


- Charging control by microprocessor
- Status of the charging by 5 leds
- Indication of the Main Alarms
- Equalization and maintenance Charging
- Wa charging cycle (DIN 41774)
- Final Charge Time adjustable
- Charging within 12 hours
- Double power supply (AC/DC)

### ADVANTAGES

- Minimum costs
- Easy use



Model	Volt	Ah			
			X	Y	H
CMH 12/30	12	30	300	180	210
CMH 12/40	12	40	300	180	210
CMH 24/20	24	20	300	180	210
CMH 24/25	24	25	300	180	210
CMH 24/30	24	30	300	180	210
CMH 24/40	24	40	300	180	210
CMH 36/25	36	25	300	180	210
CMH 36/30	36	30	300	180	210
CMH 36/40	36	40	300	180	210
CMH 48/20	48	20	300	180	210
CMH 48/30	48	30	350	230	260
CMH 48/40	48	40	350	230	260

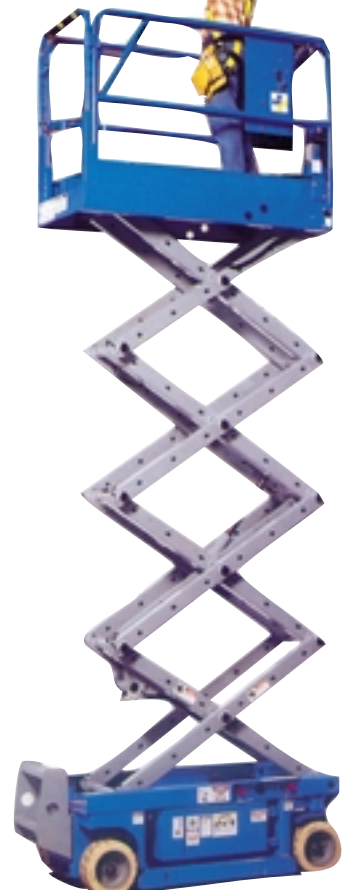

Charger standard equipped with relay cuts off the driving function while charging.

Wa charging cycle with equalization & maintenance charge.